


ACOUSTICGYPS PS 50X50 C STUD PARTITION PROFILE

TU 25.11.23-001-21056832-2019

TNVED 7308909809

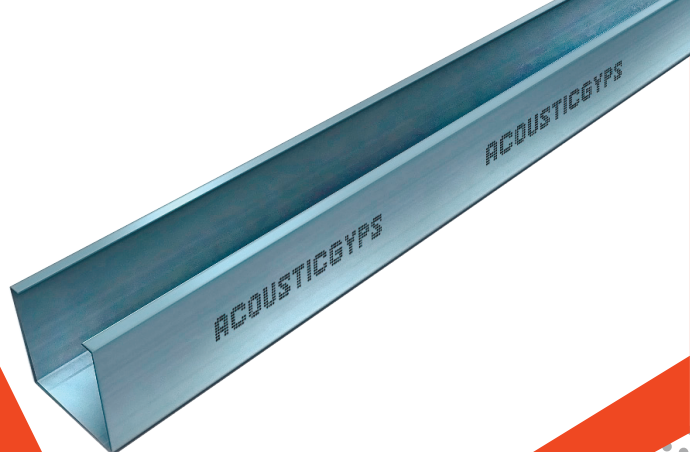

DESCRIPTION

The reinforced profile for frame sheathed structures with the use of GKLZ (Soundproofing Gypsum Board), GSP (Gypsum Chipboard), GVL (Gypsum-Fibre Board) is made by steel band cold-rolling method. Serves as wall studs of partitions and wall covering frames. Recommended for use in GKLZ AcousticGyps systems.

COMPOSITION

– galvanized steel.

MODIFICATIONS

Modifications	Length, mm	Width, mm	Thickness, mm	Height, mm	Weight, kg
AcousticGyps PS 50x50	3 000	50	0,6	50	2,17

APPLICATION

- for frames of sound absorbing partitions and wall coverings to be mounted in combination with guiding profile PN 50x40.

FEATURES

- AcousticGyps profile is made of high grade steel of 0.6 mm thickness which ensures stiffness of structure and allows to sheath it using heavy multilayer materials and increases holding strength of fasteners in the profile;
- all profiles are marked with "AcousticGyps" thus preventing falsification;
- special strengthening ribs impart strength to the structure;
- every profile meets quality control standards.

PACKAGING AND TRANSPORTATION

Modifications	Package	No. of Profiles per Briquette, pcs	No. of Briquettes per Pallet, pcs	No. of Profiles per Briquette, linear m.	No. of Profiles per Palette, linear m.	Pallet Size, HxWxL, mm	Pallet Weight, kg
AcousticGyps PS 50x50	briquette	12	36	36	1 296	690x930x3000	935

Loading into trucks is performed by pieces, briquettes, and pallets according to Order.